


# FONDELLI ASME ASME CAPS

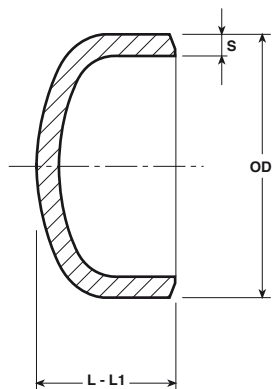

OD	L	L <sub>1</sub>	Ø-dia.	S = SCHEDULE												
				STD	XS	10	20	30	40	60	80	100	120	140	160	XXS
21,3	25,9	25,9	1/2"	2,77	3,73	—	—	—	2,77	—	3,73	—	—	—	4,75	7,47
26,7	31,7	31,7	3/4"	2,87	3,91	—	—	—	2,87	—	3,91	—	—	—	5,54	7,82
33,4	38,1	38,1	1"	3,38	4,55	—	—	—	3,38	—	4,55	—	—	—	6,35	9,09
42,4	38,1	38,1	1 1/4"	3,56	4,85	—	—	—	3,56	—	4,85	—	—	—	6,35	9,70
48,3	38,1	38,1	1 1/2"	3,68	5,08	—	—	—	3,68	—	5,08	—	—	—	7,14	10,16
60,3	38,1	44,4	2"	3,91	5,54	—	—	—	3,91	—	5,54	—	—	—	8,74	11,07
73,0	38,1	50,8	2 1/2"	5,16	7,01	—	—	—	5,16	—	7,01	—	—	—	9,52	14,02
88,9	50,8	63,5	3"	5,49	7,62	—	—	—	5,49	—	7,62	—	—	—	11,12	15,24
101,6	63,5	76,2	3 1/2"	5,74	8,08	—	—	—	5,74	—	8,08	—	—	—	—	—
114,3	63,5	76,2	4"	6,02	8,56	—	—	—	6,02	—	8,56	—	11,12	—	13,49	17,12
141,3	76,2	88,9	5"	6,55	9,52	—	—	—	6,55	—	9,52	—	12,70	—	15,87	19,05
168,3	88,9	101,6	6"	7,11	10,97	—	—	—	7,11	—	10,97	—	14,27	—	18,24	21,94
219,1	101,6	127,0	8"	8,18	12,70	—	6,35	7,04	8,18	10,30	12,70	15,06	18,24	20,62	23,01	22,22
273,0	127,0	152,4	10"	9,27	12,70	—	6,35	7,80	9,27	12,70	15,06	18,24	21,41	25,40	28,57	25,40
323,8	152,4	177,8	12"	9,52	12,70	—	6,35	8,38	10,31	14,30	17,45	21,41	25,40	28,57	33,32	25,40
355,6	165,1	190,5	14"	9,52	12,70	6,35	7,92	9,52	11,12	15,10	19,05	23,80	27,76	31,75	35,71	—
406,4	177,8	203,2	16"	9,52	12,70	6,35	7,92	9,52	12,70	16,70	21,41	26,19	30,94	36,52	40,46	—
457,2	203,2	228,6	18"	9,52	12,70	6,35	7,92	11,12	14,27	19,05	23,80	29,36	34,92	39,67	45,24	—
508,0	228,6	254,0	20"	9,52	12,70	6,35	9,52	12,70	15,06	20,60	26,19	32,54	38,10	44,45	49,99	—
558,8	254,0	279,4	22"	9,52	12,70	6,35	9,52	12,70	—	—	—	—	—	—	—	—
609,6	266,7	304,8	24"	9,52	12,70	6,35	9,52	14,25	17,45	24,60	30,94	38,89	46,02	52,37	59,51	—
660,4	266,7	—	26"	9,52	12,70	7,92	12,70	—	—	—	—	—	—	—	—	—
711,2	266,7	—	28"	9,52	12,70	7,92	12,70	15,88	—	—	—	—	—	—	—	—
762,0	266,7	—	30"	9,52	12,70	7,92	12,70	15,88	—	—	—	—	—	—	—	—
812,8	266,7	—	32"	9,52	12,70	7,92	12,70	15,88	17,45	—	—	—	—	—	—	—
863,6	266,7	—	34"	9,52	12,70	7,92	12,70	15,88	17,45	—	—	—	—	—	—	—
914,4	266,7	—	36"	9,52	12,70	7,92	12,70	15,88	19,05	—	—	—	—	—	—	—
965,2	305	—	38"	9,52	12,70	—	—	—	—	—	—	—	—	—	—	—
1016,0	305	—	40"	9,52	12,70	—	—	—	—	—	—	—	—	—	—	—
1066,8	305	—	42"	9,52	12,70	—	—	—	—	—	—	—	—	—	—	—
1168,4	343	—	46"	9,52	12,70	—	—	—	—	—	—	—	—	—	—	—
1219,2	343	—	48"	9,52	12,70	—	—	—	—	—	—	—	—	—	—	—

### NOTE

- L PER SPESSORI FINO A SX - L<sub>1</sub> PER SPESSORI OLTRE XS
- FONDELLI CON CON SPESSORI O DIMENSIONAMENTI PARTICOLARI: A RICHIESTA

### Remarks

- L for thickness up to XS - L<sub>1</sub> for thickness over XS
- Caps with special thickness and size: on application